


TR65N

Semiautomatic glazing bead saw



CE

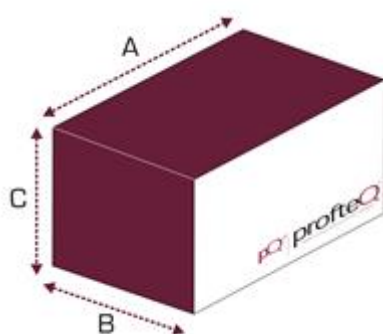

Ver.	A (mm)	B (mm)	C (mm)	Kg
TR65N	550	1300	1250	120
TR65N + roller tables	6600	1300	1250	120


Technical specifications:

- Cut 2 glazing beads at 45° at a time
- Two-handed command
- Vertical adjustment of cutting surface for the milling execution of the fastening foot
- No need of counterblocks. The work table can be raised and the stops can be moved to secure the glazing bead together with the clamps.
- Possibility of connection to the DigiSTOP stop and to all the DigiFAMILY products for the electronic reading of the measurement to be cut

Standard accessories:

- N° 2 blades diameter 250 mm for glazing bead cut
- N° 2 blades diameter 175 mm for fastening foot milling

Working capacity

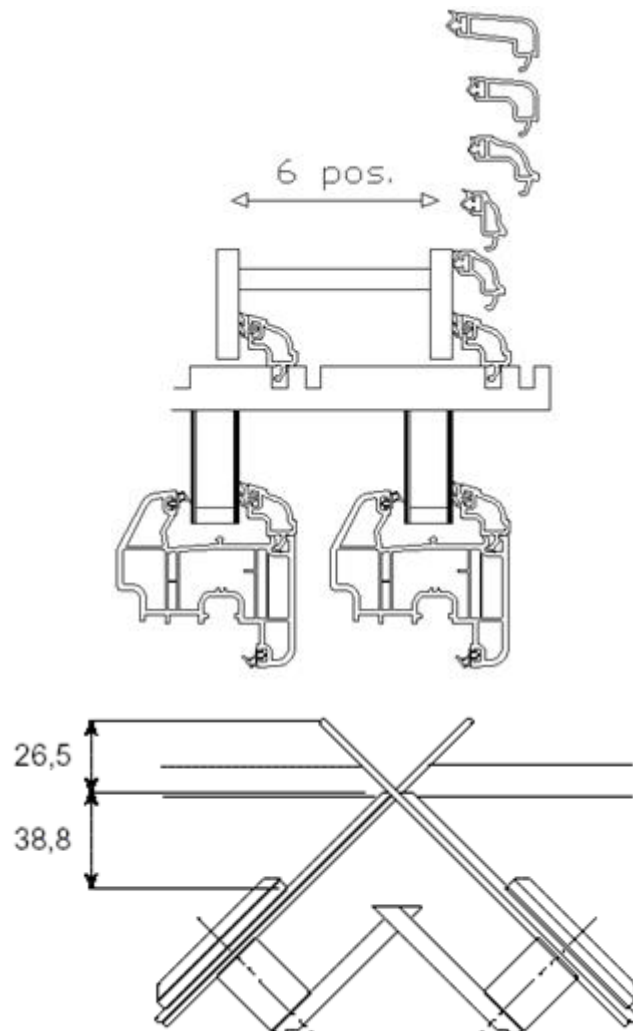



Optionals:

- No. 1 locator stop featuring metric rule and two removable gauges, one 1650 mm and the other 3000 mm
- No. 1 loading side support length 3000 mm
- No. 1 lubrication kit for aluminium sawing
- Products for the electronic reading of the measurements to be cut

Technical data:

- Voltage: 380V + N + T + L1 + L2 + L3
- Power consumption: 1,5 Kw
- Air pressure: 6 - 8 bar
- Motors: 2.800 rpm, 0,6 kw x 2
- Air Consumption: 12,5 litre/cycle